



COMPRESSED AIR TREATMENT

REDEFINED



OIL-X

COMPRESSED AIR FILTERS

Parker domnick hunter OIL-X; a new series of compressed air filters, taking efficiency to a different level.

Built on Parker's worldwide expertise in filtration, the OIL-X range has been developed to ensure consistent outstanding air quality, guaranteed for 12 months - and third-party validated to meet ISO 8573-1.

MARKET LEADING LOW DIFFERENTIAL PRESSURE

Combining the unique filter element with a specially designed advanced air flow management system, the Parker domnick hunter OIL-X range is engineered to not only deliver air quality in accordance with ISO 8573-1 classifications, but it does so with an extremely low differential pressure - ensuring maximum efficiency and productivity.

Unique filter element

Specially constructed for reduced air flow velocity, reduced pressure loss, increased dirt holding capacity, and improved efficiency. Includes a 12-month air quality guarantee.

Flow management system

Specially engineered 'bell mouth', with 90-degree elbow, flow distributor and conical flow diffuser, to promote a consistent, optimum air flow.

Filter housing

Designed to allow easy maintenance and element replacement, and covered by a 10-year guarantee.

Flexible connections

A wide range of port sizes and filter connections, for added flexibility.

Epoxy coating

Finished with alocrom corrosion protection and a tough, dry powder epoxy coating for a high quality feel.

Product Selection

| Grades | Element Type | Model Size / Port Connection | | Thread Connection | Drain Type | Differential Pressure Indicator* |
|---|--------------|--|---|---|---|----------------------------------|
| AA | P | 030 | G | G | F | I |
| <ul style="list-style-type: none"> WS AO AA ACS | P | <ul style="list-style-type: none"> 010 A (¼") 010 B (⅜") 010 C (½") 015 C (½") 020 D (¾") 025 D (¾") 025 E (1") 030 G (1 ½") 035 G (1 ½") 040 H (2") 045 I (2 ½") 050 I (2 ½") 055 I (2 ½") 055 J (3") 060 K (4") | <ul style="list-style-type: none"> G (BSPP) N (NPT) | <ul style="list-style-type: none"> F (Float) M (Manual) | <ul style="list-style-type: none"> X (None) I (DPI) | |

* AO/AA only available with differential pressure indicator (I) WS/ACS only available without differential pressure indicator (X)

OIL-X Water Separators

Technical Data

| Filtration Grade | Filter Type | Drain Type | Min Operating Pressure | | Max Operating Pressure | | Min Operating Temperature | | Max Operating Temperature | |
|------------------|-----------------|------------|------------------------|-------|------------------------|-------|---------------------------|----|---------------------------|-----|
| | | | bar g | psi g | bar g | psi g | °C | °F | °C | °F |
| WSP010-WSP050 | Water Separator | Float | 1 | 15 | 16 | 232 | 2 | 35 | 80 | 176 |
| WSP060 | Water Separator | Float | 1 | 15 | 16 | 232 | 2 | 35 | 66 | 150 |

Flow Rates

Stated flows are for operation at 7 bar g (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

| Model | Port Connection | Flow Rates | | | |
|--------------|-----------------|------------|--------|-------|------|
| | | L/s | m³/min | m³/hr | scfm |
| WSP010A □ FX | ¼" | 10 | 0.6 | 36 | 21 |
| WSP010B □ FX | ⅜" | 10 | 0.6 | 36 | 21 |
| WSP010C □ FX | ½" | 10 | 0.6 | 36 | 21 |
| WSP015C □ FX | ½" | 40 | 2.4 | 144 | 85 |
| WSP020D □ FX | ¾" | 40 | 2.4 | 144 | 85 |
| WSP025D □ FX | ¾" | 110 | 6.6 | 396 | 233 |
| WSP025E □ FX | 1" | 110 | 6.6 | 396 | 233 |
| WSP030G □ FX | 1 ½" | 110 | 6.6 | 396 | 233 |
| WSP035G □ FX | 1 ½" | 350 | 21.0 | 1260 | 742 |
| WSP040H □ FX | 2" | 350 | 21.0 | 1260 | 742 |
| WSP045I □ FX | 2 ½" | 350 | 21.0 | 1260 | 742 |
| WSP050I □ FX | 2 ½" | 800 | 48.0 | 2880 | 1695 |
| WSP055J □ FX | 3" | 800 | 48.0 | 2880 | 1695 |
| WSP060K □ FX | 4" | 1000 | 60.0 | 3600 | 2119 |

□ = Replace with thread connection G (BSPP) or N (NPT)

Correction Factors

Please apply these correction factors to flows other than 7 bar g (102 psi g) .

| Line Pressure | | Correction Factor Pressure (CFP) |
|---------------|-------|----------------------------------|
| bar g | psi g | |
| 1 | 15 | 4 |
| 2 | 29 | 2.63 |
| 3 | 44 | 2.00 |
| 4 | 58 | 1.59 |
| 5 | 73 | 1.33 |
| 6 | 87 | 1.14 |
| 7 | 100 | 1.00 |
| 8 | 116 | 0.94 |
| 9 | 131 | 0.89 |
| 10 | 145 | 0.85 |
| 11 | 160 | 0.82 |
| 12 | 174 | 0.79 |
| 13 | 189 | 0.76 |
| 14 | 203 | 0.73 |
| 15 | 218 | 0.71 |
| 16 | 232 | 0.68 |

Applying Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating pressure of the system.

1. Obtain the minimum operating pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum operating pressure from the CFP table (always round down e.g for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity : Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity)

OIL-X Coalescing & Dry Particulate Filters

Technical Data

| Filtration Grade | Filter Type | Drain Type | Min Operating Pressure | | Max Operating Pressure | | Min Operating Temperature | | Max Operating Temperature | |
|------------------|--------------------|------------|------------------------|-------|------------------------|-------|---------------------------|----|---------------------------|-----|
| | | | bar g | psi g | bar g | psi g | °C | °F | °C | °F |
| A0/AA | Coalescing | Float | 1 | 15 | 16 | 232 | 2 | 35 | 80 | 176 |
| A0/AA | Dry Particulate | Manual | 1 | 15 | 20 | 290 | 2 | 35 | 100 | 212 |
| ACS | Oil Vapour Removal | Manual | 1 | 15 | 20 | 290 | 2 | 35 | 50 | 122 |

Flow Rates

Stated flows are for operation at 7 bar g (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

| Model | Port Connection | Flow Rates | | | | Replacement Elements |
|-------------------|-----------------|------------|--------|-------|------|----------------------|
| | | L/s | m³/min | m³/hr | scfm | |
| GRADE P010A □(*)□ | ¼" | 10 | 0.6 | 36 | 21 | P010 GRADE |
| GRADE P010B □(*)□ | ¾" | 10 | 0.6 | 36 | 21 | P010 GRADE |
| GRADE P010C □(*)□ | ½" | 10 | 0.6 | 36 | 21 | P010 GRADE |
| GRADE P015C □(*)□ | ½" | 20 | 1.2 | 72 | 42 | P015 GRADE |
| GRADE P020C □(*)□ | ½" | 30 | 1.8 | 108 | 64 | P020 GRADE |
| GRADE P020D □(*)□ | ¾" | 30 | 1.8 | 108 | 64 | P020 GRADE |
| GRADE P025D □(*)□ | ¾" | 60 | 3.6 | 216 | 127 | P025 GRADE |
| GRADE P025E □(*)□ | 1" | 60 | 3.6 | 216 | 127 | P025 GRADE |
| GRADE P030G □(*)□ | 1 ½" | 110 | 6.6 | 396 | 233 | P030 GRADE |
| GRADE P035G □(*)□ | 1 ½" | 160 | 9.6 | 576 | 339 | P035 GRADE |
| GRADE P040H □(*)□ | 2" | 220 | 13.2 | 792 | 466 | P040 GRADE |
| GRADE P045I □(*)□ | 2 ½" | 330 | 19.8 | 1188 | 699 | P045 GRADE |
| GRADE P050I □(*)□ | 2 ½" | 430 | 25.9 | 1548 | 911 | P050 GRADE |
| GRADE P055I □(*)□ | 2 ½" | 620 | 37.3 | 2232 | 1314 | P055 GRADE |
| GRADE P055J □(*)□ | 3" | 620 | 37.3 | 2232 | 1314 | P055 GRADE |
| GRADE P060K □(*)□ | 4" | 1000 | 60.0 | 3600 | 2119 | P060 GRADE |

(*) = Replace with (F) when ordering A0/AA coalescing filters, (M) when ordering A0/AA dry particulate filters or (M) when ordering ACS oil vapour removal filters

Correction Factors

Please apply these correction factors to the flow at pressures other than 7 bar g (102 psi g).

| Line Pressure | | Correction Factor Pressure (CFP) |
|---------------------------|-------|----------------------------------|
| bar g | psi g | |
| 1 | 15 | 2.65 |
| 2 | 29 | 1.87 |
| 3 | 44 | 1.53 |
| 4 | 58 | 1.32 |
| 5 | 73 | 1.18 |
| 6 | 87 | 1.08 |
| 7 | 100 | 1.00 |
| 8 | 116 | 0.94 |
| 9 | 131 | 0.88 |
| 10 | 145 | 0.84 |
| 11 | 160 | 0.80 |
| 12 | 174 | 0.76 |
| 13 | 189 | 0.73 |
| 14 | 203 | 0.71 |
| 15 | 218 | 0.68 |
| 16 | 232 | 0.66 |
| Manual drain filters only | | |
| 17 | 248 | 0.64 |
| 18 | 263 | 0.62 |
| 19 | 277 | 0.61 |
| 20 | 290 | 0.59 |

Applying Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating pressure of the system.


1. Obtain the minimum operating pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum operating pressure from the CFP table (always round down e.g for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity : Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity)

Filtration Performance

| Filtration Grade | WS | A0 | AA | ACS |
|---|---------------------|--------------------------------------|--------------------------------------|-----------------------------|
| Filter Type | Bulk Liquid Removal | Coalescing & Dry Particulate | Coalescing & Dry Particulate | Oil Vapour Removal |
| Particle Removal (inc water & oil aerosols) | N/A | Down to 1 micron | Down to 0.01 micron | N/A |
| Max Remaining Oil Content at 21°C (70°F) | N/A | 0.5mg/m³ 0.5 ppm(w) | 0.01mg/m³ 0.01 ppm(w) | 0.003 mg/m³ 0.003 ppm(w) |
| Filtration Efficiency | >92% | 99.925% | 99.9999% | N/A |
| Test Methods Used | ISO8573.9 | ISO8573.2 ISO8573.4 ISO12500-1 | ISO8573.2 ISO8573.4 ISO12500-1 | ISO8573.5 |
| ISO12500-1 Inlet Challenge Concentration | N/A | 40mg/m³ | 10mg/m³ | N/A |
| Initial Dry Differential Pressure | N/A | <70 mbar (1.0psi) | <70 mbar (1.0psi) | <140 mbar (2.0psi) |
| Initial Saturated Differential Pressure | N/A | <125 mbar (1.8psi) | <125 mbar (1.8psi) | N/A |
| Change Element Every | N/A | 12 months | 12 months | When Oil Vapour is Detected |
| Precede with Filtration Grade | N/A | WS (for bulk liquid) | A0 | AA |

Weight & Dimensions

| Model | Height (H) | | Width (W) | | Depth (D) | | Weight | |
|-------|------------|-------|-----------|-------|-----------|-------|--------|-------|
| | mm | ins | mm | ins | mm | ins | kg | lbs |
| 010A | 180 | 7.09 | 76 | 2.99 | 66 | 2.60 | 0.61 | 1.34 |
| 010B | 180 | 7.09 | 76 | 2.99 | 66 | 2.60 | 0.61 | 1.34 |
| 010C | 180 | 7.09 | 76 | 2.99 | 66 | 2.60 | 0.61 | 1.34 |
| 015C | 238.5 | 9.39 | 89 | 3.5 | 83.5 | 3.29 | 1.16 | 2.58 |
| 020C | 238.5 | 9.39 | 89 | 3.5 | 83.5 | 3.29 | 1.12 | 2.47 |
| 020D | 238.5 | 9.39 | 89 | 3.5 | 83.5 | 3.29 | 1.12 | 2.47 |
| 025D | 277 | 10.9 | 120 | 4.72 | 114.5 | 4.50 | 2.21 | 4.86 |
| 025E | 277 | 10.9 | 120 | 4.72 | 114.5 | 4.50 | 2.21 | 4.86 |
| 030G | 367 | 14.45 | 120 | 4.72 | 114.5 | 4.50 | 2.68 | 5.91 |
| 035G | 531 | 20.9 | 164 | 6.46 | 156 | 6.10 | 6.90 | 15.20 |
| 040H | 623 | 24.5 | 164 | 6.46 | 156 | 6.10 | 7.30 | 16.10 |
| 045I | 623 | 24.5 | 164 | 6.46 | 156 | 6.10 | 7.10 | 15.65 |
| 050I | 745 | 29.3 | 192 | 7.56 | 183 | 7.20 | 10.30 | 22.71 |
| 055I | 935 | 36.8 | 192 | 7.56 | 183 | 7.20 | 15.30 | 33.73 |
| 055J | 935 | 36.8 | 192 | 7.56 | 183 | 7.20 | 15.30 | 33.73 |
| 060K | 847 | 33.3 | 420 | 16.54 | 282 | 11.10 | 44.50 | 98.11 |

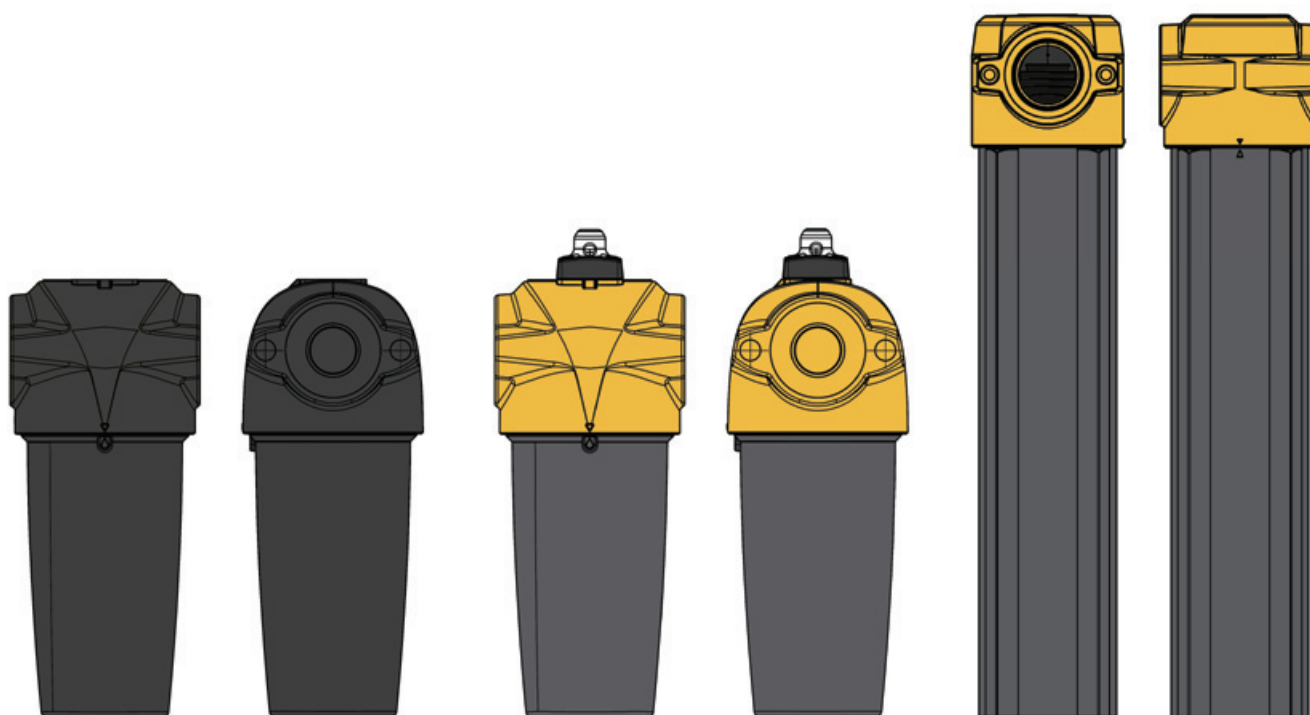

For more information please contact your local sales office or visit www.parker.com/gsf

Parker has a continuous policy of product development and although the company reserves the right to changes specifications, it attempts to keep customers informed of any alterations.

© 2016 Parker Hannifin Corporation. All rights reserved.

Catalogue: PISOILX-02-EN



Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park,
Warwick, CV34 6TU
United Kingdom
Tel.: +44 (0) 1926 317 878
Fax: +44 (0) 1926 317 855
parker.uk@parker.com
www.parker.com/gsf

Your local authorized Parker distributor